

Exhibit 5



US010965512B2

(12) **United States Patent**
Li et al.

(10) **Patent No.:** **US 10,965,512 B2**

(45) **Date of Patent:** **Mar. 30, 2021**

(54) **METHOD AND APPARATUS USING CELL-SPECIFIC AND COMMON PILOT SUBCARRIERS IN MULTI-CARRIER, MULTI CELL WIRELESS COMMUNICATION NETWORKS**

(71) Applicant: **Neo Wireless LLC**, Wayne, PA (US)

(72) Inventors: **Xiaodong Li**, Kirkland, WA (US); **Titus Lo**, Bellevue, WA (US); **Kemin Li**, Bellevue, WA (US); **Haiming Huang**, Bellevue, WA (US)

(73) Assignee: **NEO WIRELESS LLC**, Wayne, PA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/012,813**

(22) Filed: **Sep. 4, 2020**

(65) **Prior Publication Data**

US 2020/0403838 A1 Dec. 24, 2020

Related U.S. Application Data

(63) Continuation of application No. 16/440,754, filed on Jun. 13, 2019, which is a continuation of application (Continued)

(51) **Int. Cl.**
H04W 4/00 (2018.01)
H04L 27/26 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04L 27/2637** (2013.01); **H04B 1/707** (2013.01); **H04B 7/0413** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H04L 5/0053; H04L 5/0007; H04L 5/0048
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,825,807 A 10/1998 Kumar
5,828,650 A 10/1998 Malkamaki et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1407745 4/2003
CN 1445949 10/2003
(Continued)

OTHER PUBLICATIONS

European Telecommunications Standards Institute, Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation for digital terrestrial television, ETSI EN 300 744 V1.5.1 (Jun. 2004).

(Continued)


Primary Examiner — Omoniyi Obayanju

(74) *Attorney, Agent, or Firm* — Volpe Koenig

(57) **ABSTRACT**

A multi-carrier cellular wireless network (400) employs base stations (404) that transmit two different groups of pilot subcarriers: (1) cell-specific pilot subcarriers, which are used by a receiver to extract information unique to each individual cell (402), and (2) common pilots subcarriers, which are designed to possess a set of characteristics common to all the base stations (404) of the system. The design criteria and transmission formats of the cell-specific and common pilot subcarriers are specified to enable a receiver to perform different system functions. The methods and processes can be extended to other systems, such as those with multiple antennas in an individual sector and those where some subcarriers bear common network/system information.

30 Claims, 13 Drawing Sheets

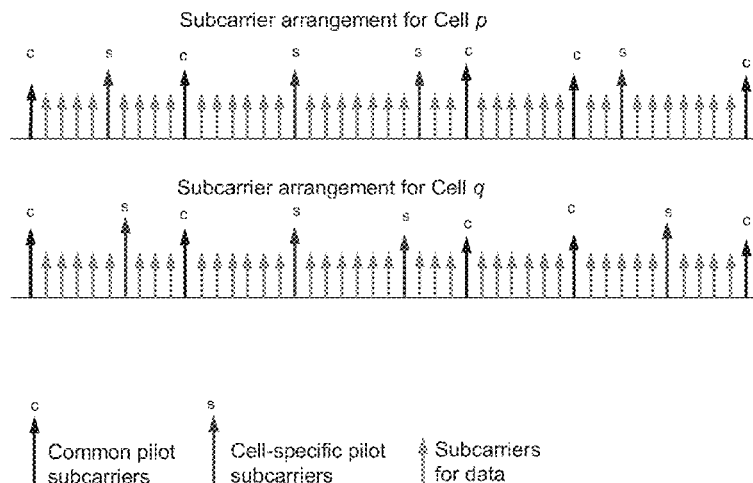

US 10,965,512 B2

Page 2

Related U.S. Application Data

- No. 15/688,441, filed on Aug. 28, 2017, now Pat. No. 10,326,631, which is a continuation of application No. 14/746,676, filed on Jun. 22, 2015, now Pat. No. 9,749,168, which is a continuation of application No. 14/595,132, filed on Jan. 12, 2015, now Pat. No. 9,065,614, which is a continuation of application No. 13/874,278, filed on Apr. 30, 2013, now Pat. No. 8,934,473, which is a continuation of application No. 13/212,116, filed on Aug. 17, 2011, now Pat. No. 8,432,891, which is a continuation of application No. 10/583,530, filed as application No. PCT/US2005/001939 on Jan. 20, 2005, now Pat. No. 8,009,660.
- (60) Provisional application No. 60/540,032, filed on Jan. 29, 2004.
- (51) **Int. Cl.**
H04W 16/02 (2009.01)
H04B 1/707 (2011.01)
H04L 5/00 (2006.01)
H04L 25/03 (2006.01)
H04L 27/00 (2006.01)
H04W 72/04 (2009.01)
H04B 7/0413 (2017.01)
H04J 11/00 (2006.01)
H04L 25/02 (2006.01)
- (52) **U.S. Cl.**
CPC **H04J 11/005** (2013.01); **H04L 5/0007** (2013.01); **H04L 5/0028** (2013.01); **H04L 5/0048** (2013.01); **H04L 25/03834** (2013.01); **H04L 27/0008** (2013.01); **H04L 27/0012** (2013.01); **H04L 27/2602** (2013.01); **H04L 27/2613** (2013.01); **H04L 27/2626** (2013.01); **H04L 27/2646** (2013.01); **H04W 16/02** (2013.01); **H04W 72/044** (2013.01); **H04W 72/0446** (2013.01); **H04L 5/0016** (2013.01); **H04L 25/0228** (2013.01); **H04L 27/2607** (2013.01); **H04L 27/2655** (2013.01); **H04L 27/2657** (2013.01)
- (56) **References Cited**
U.S. PATENT DOCUMENTS

5,867,478 A 2/1999 Baum et al.
5,909,436 A 6/1999 Engstrom et al.
6,141,546 A 10/2000 Thomas
6,175,550 B1 1/2001 van Nee
6,188,717 B1 2/2001 Kaiser et al.
6,434,364 B1 8/2002 O'Riordain
6,480,558 B1 11/2002 Otosson et al.
6,515,960 B1 2/2003 Usui et al.
6,567,383 B1 5/2003 Bohnke
6,643,281 B1 11/2003 Ryan
6,731,673 B1 5/2004 Kotov et al.
6,741,578 B1 5/2004 Moon et al.
6,771,706 B2 8/2004 Ling et al.
6,847,678 B2 1/2005 Berezdivin et al.
6,882,619 B1 4/2005 Gerakoulis
6,922,388 B1 7/2005 Laroia et al.
6,940,827 B2 9/2005 Li et al.
7,035,663 B1 4/2006 Linebarger et al.
7,039,001 B2 5/2006 Krishnan et al.
7,062,002 B1 6/2006 Michel et al.
7,123,934 B1 10/2006 Linebarger et al.
7,133,352 B1 11/2006 Hadad
7,149,239 B2 12/2006 Hudson
7,161,985 B2 1/2007 Dostert et al.
7,161,987 B2 1/2007 Webster et al.

7,218,666 B2 5/2007 Baum et al.
7,260,054 B2 8/2007 Olszewski
7,274,652 B1 9/2007 Webster et al.
7,317,931 B2 1/2008 Guo
7,342,974 B2 3/2008 Chiou
7,386,055 B2 6/2008 Morita et al.
7,403,556 B2 7/2008 Kao et al.
7,411,897 B2 8/2008 Yoo et al.
7,418,042 B2 8/2008 Choi et al.
7,443,829 B2 10/2008 Rizvi et al.
7,471,667 B2 12/2008 Hirsch et al.
7,548,506 B2 6/2009 Ma et al.
7,555,268 B2 6/2009 Trachewsky et al.
7,567,624 B1 7/2009 Schmidl et al.
7,639,660 B2 12/2009 Kim et al.
7,646,747 B2 1/2010 Atarashi et al.
7,650,152 B2* 1/2010 Li H04L 25/0228 455/452.1

7,693,032 B2 4/2010 Li et al.
7,724,720 B2 5/2010 Korpela et al.
7,738,437 B2 6/2010 Ma
7,864,725 B2 1/2011 Li et al.
7,873,009 B2 1/2011 Larsson et al.
7,876,716 B2 1/2011 Sudo
7,907,592 B2 3/2011 Han et al.
8,009,660 B2 8/2011 Li et al.
8,089,887 B2 1/2012 Lippman et al.
8,094,611 B2 1/2012 Li et al.
8,102,832 B2 1/2012 Agrawal et al.
8,363,691 B2 1/2013 Hasegawa et al.
8,428,009 B2 4/2013 Li et al.
8,432,891 B2 4/2013 Li et al.
8,767,522 B2 7/2014 Li et al.

2001/0021182 A1 9/2001 Wakutsu
2002/0141483 A1 10/2002 Doetsch et al.
2002/0159422 A1 10/2002 Li et al.
2003/0072255 A1 4/2003 Ma et al.
2003/0081538 A1 5/2003 Walton et al.
2003/0179776 A1 9/2003 Sumasu et al.
2004/0085946 A1 5/2004 Morita et al.
2004/0171357 A1 9/2004 Lobinger
2004/0190598 A1* 9/2004 Seki H04B 7/0669 375/141

2004/0264600 A1 12/2004 Kao et al.
2005/0111397 A1 5/2005 Attar et al.
2006/0114815 A1 6/2006 Hasegawa
2006/0245409 A1 11/2006 Korpela
2008/0304551 A1 12/2008 Li et al.
2011/0211617 A1 9/2011 Li et al.
2011/0299474 A1 12/2011 Li et al.
2012/0106513 A1 5/2012 Li et al.
2001/0242937 9/2013 Li et al.
2013/0242937 A1 9/2013 Li et al.

FOREIGN PATENT DOCUMENTS

CN 1452326 10/2003
EP 1 650 891 4/2006
JP 09-233047 9/1997
JP 10-210002 8/1998
KR 2001-0083789 9/2001
KR 2003-0060892 7/2003
KR 2009-0040929 4/2009
WO 2003/058881 7/2003

OTHER PUBLICATIONS

Examination Report, European Application No. 05711777.2, dated Oct. 29, 2012, 6 pages.
Examination Report, European Application No. 05712825.8, dated Aug. 16, 2012, 6 pages.
IEEE Standard for Local and metropolitan area networks; Part 16: Air Interface for Fixed Broadband Wireless Access Systems—Amendment 2: Medium Access Control Modifications and Additional Physical Layer Specifications for 2-11 GHz, IEEE Std. 802.16a—2003 (Apr. 1, 2003).
International Search Report and Written Opinion for International Application No. PCT/US05/01939, dated Apr. 26, 2005, 7 pages.

US 10,965,512 B2

Page 3

(56)

References Cited


OTHER PUBLICATIONS

International Search Report and Written Opinion; International Patent Application No. PCT/US05/03518; Filed Jan. 27, 2005; Applicant: WalticalSolutions, Inc.; dated May 23, 2005; 8 pages. Supplementary European Search Report, European Application No. 05711777, May 7, 2012, 6 pages.

Supplementary European Search Report, European Application No. 05712825, dated Mar. 26, 2012, 4 pages.

Tufvesson, F., et al. "OFDM Time and Frequency Synchronization by Spread Spectrum Pilot Technique," Communication Theory Mini-Conference, Vancouver, B.C., Canada, Jun. 6-10, 1999, pp. 115-119.

* cited by examiner

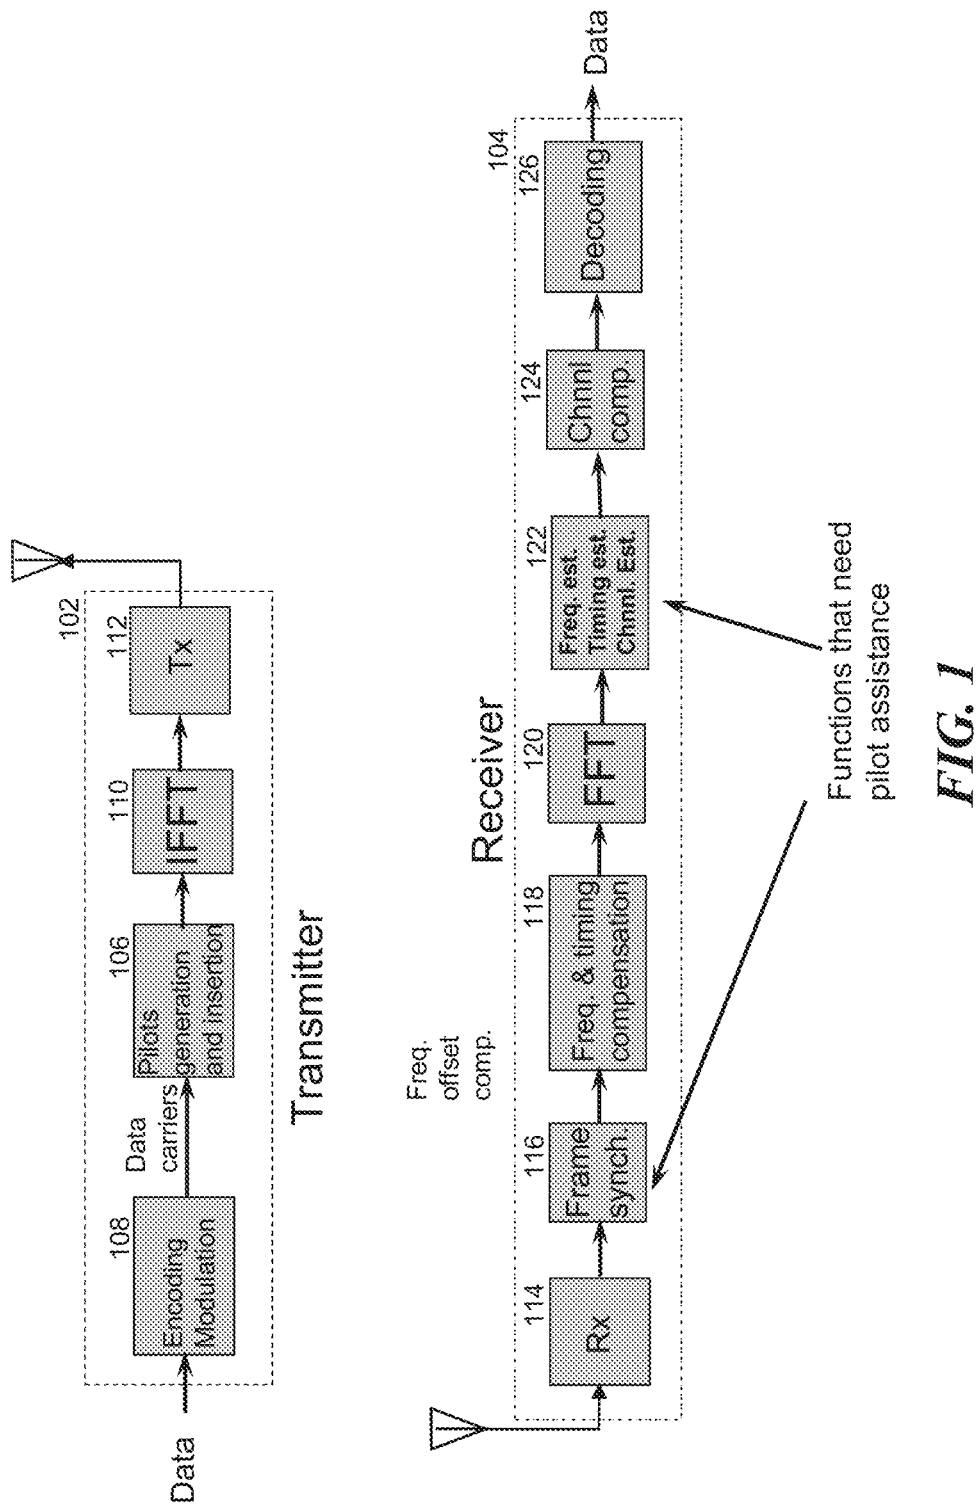

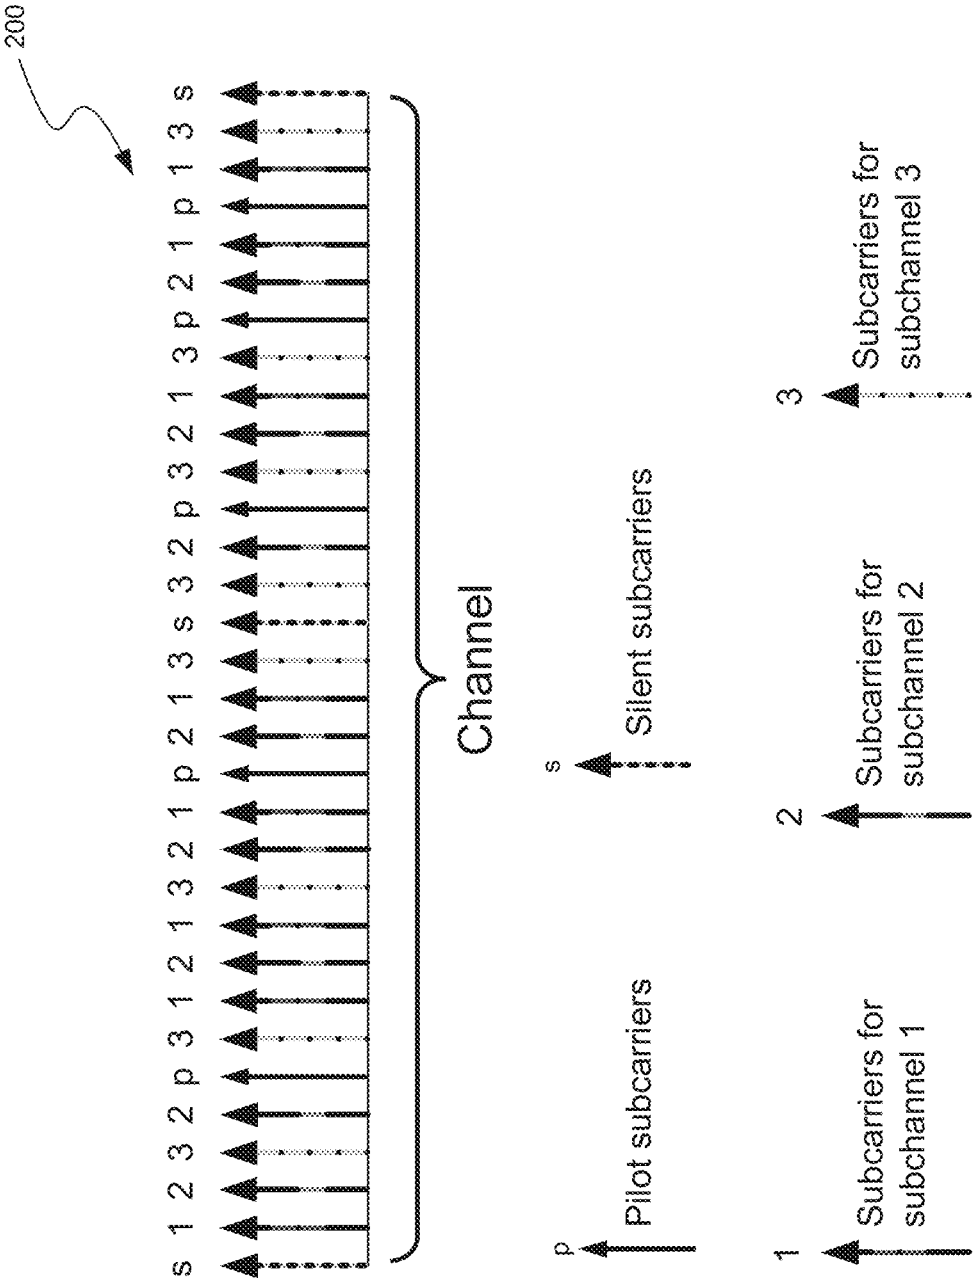


FIG. 2

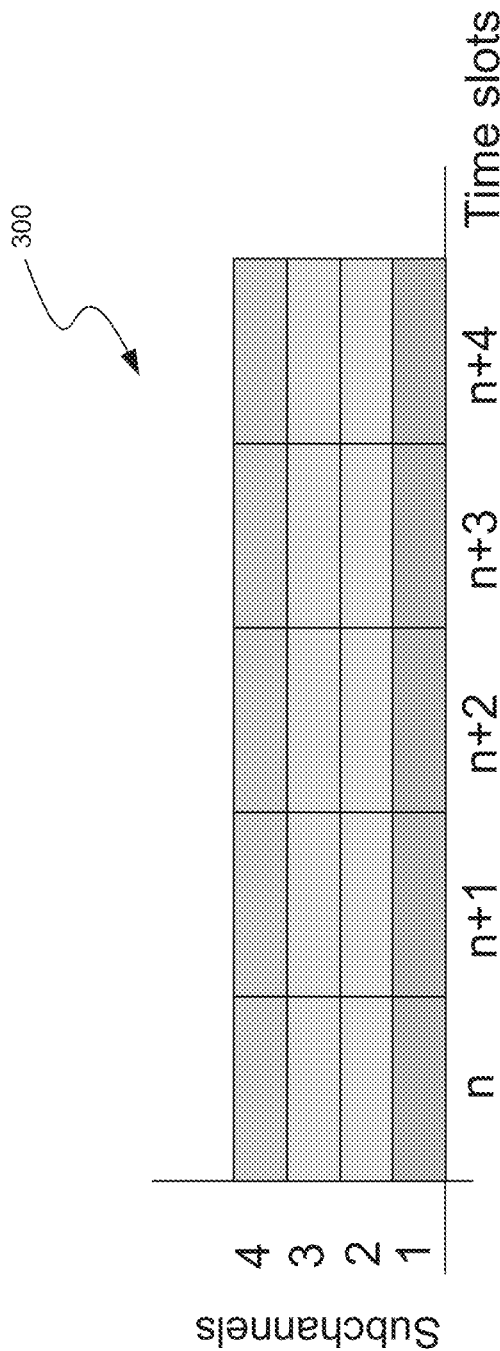


FIG. 3

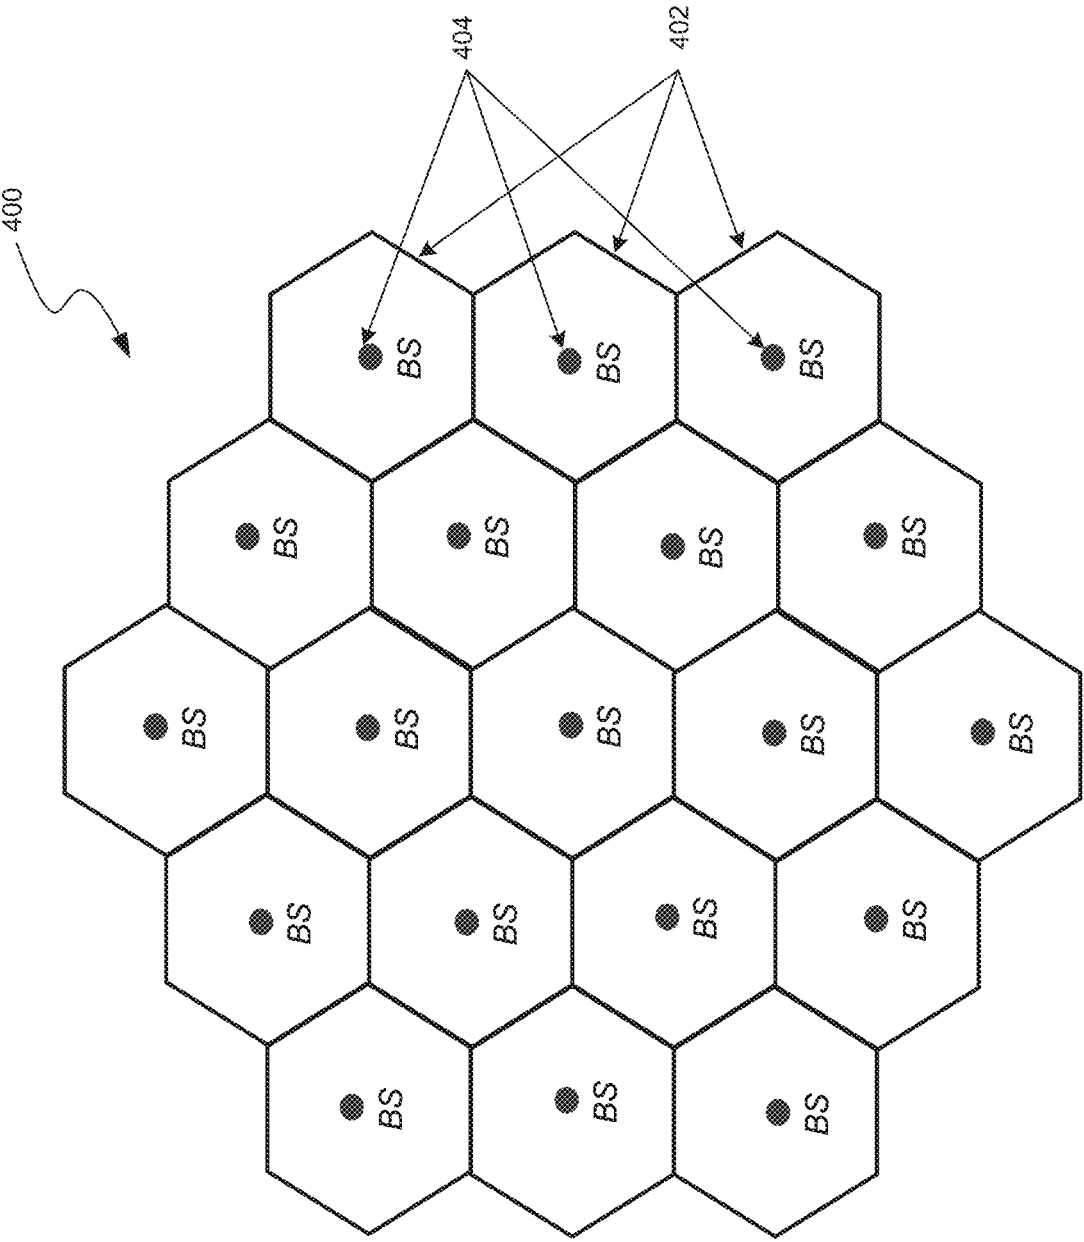


FIG. 4

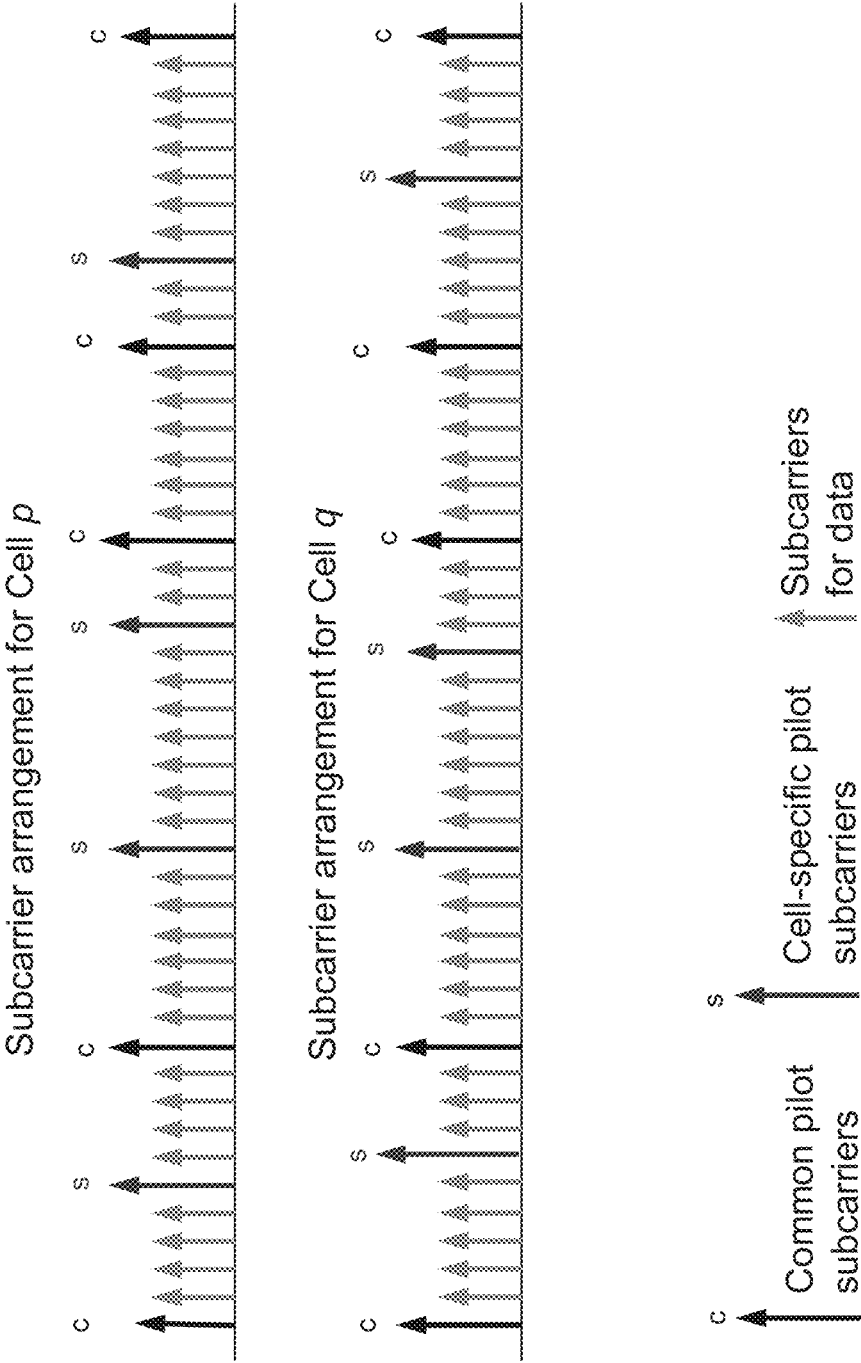
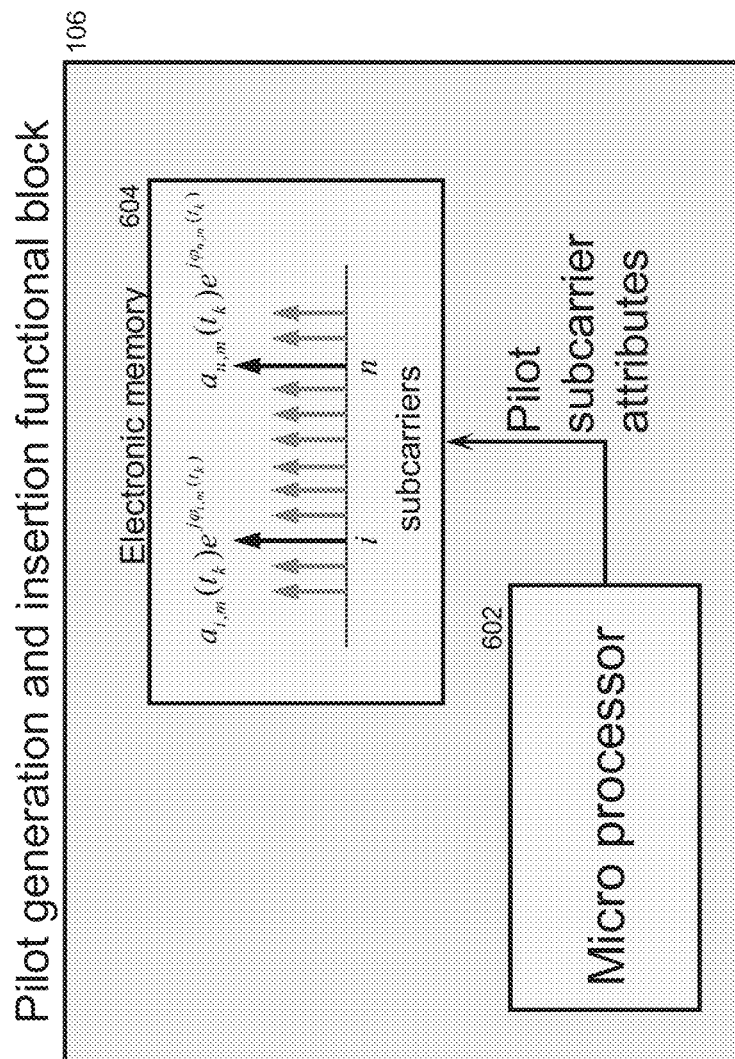
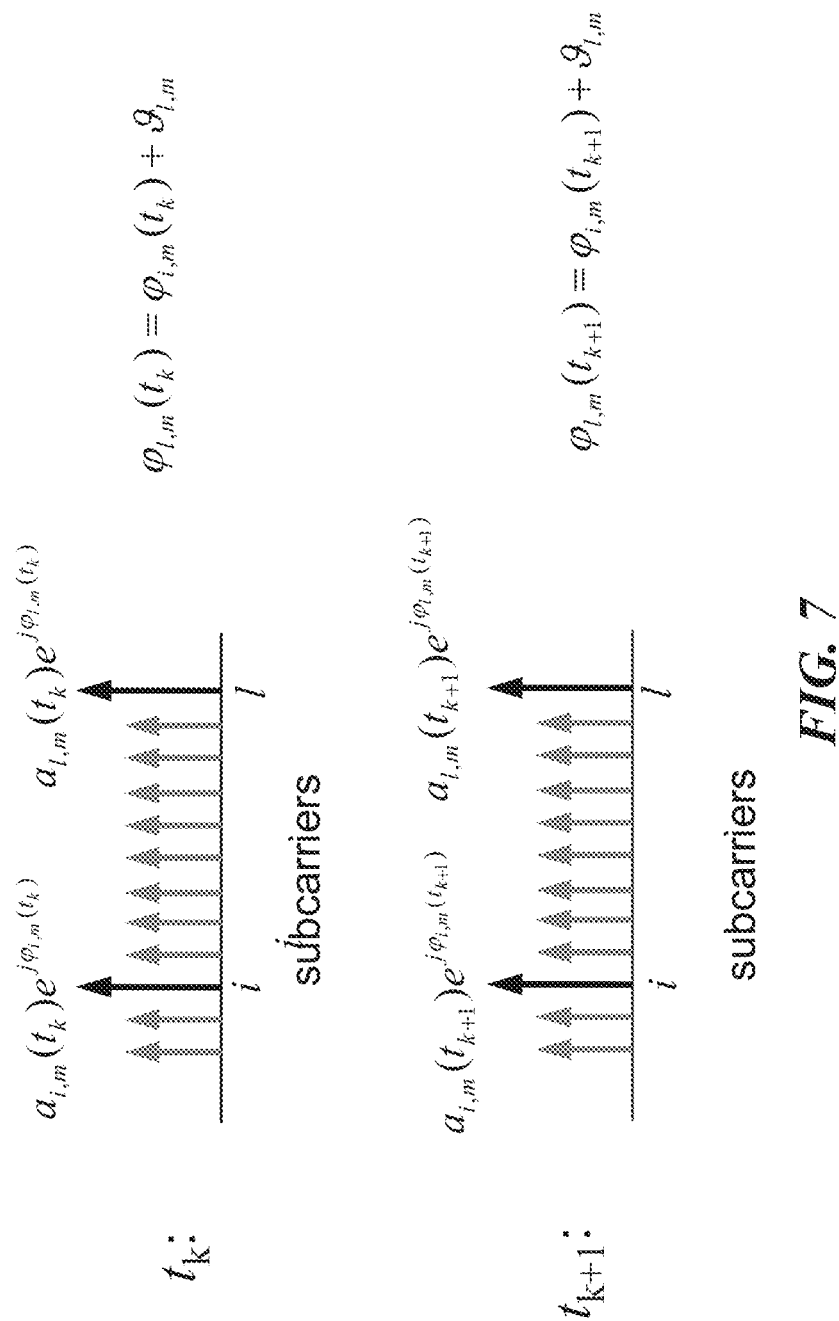


FIG. 5

**FIG. 6**




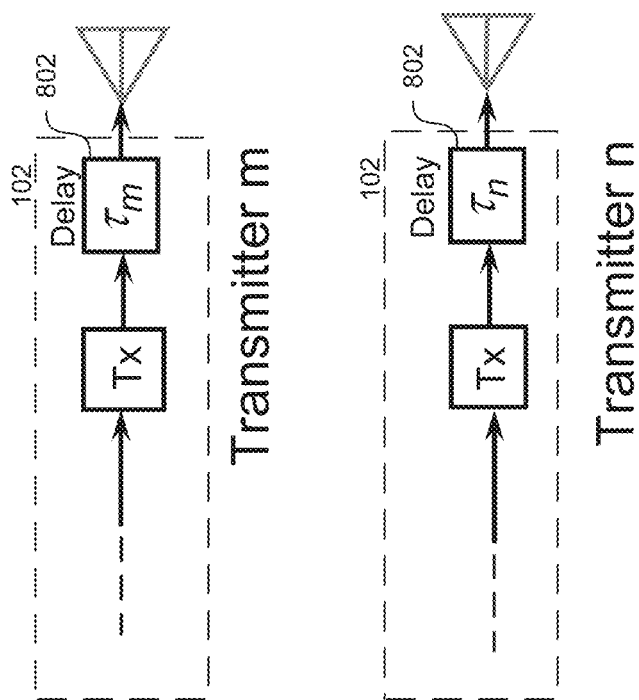


FIG. 8

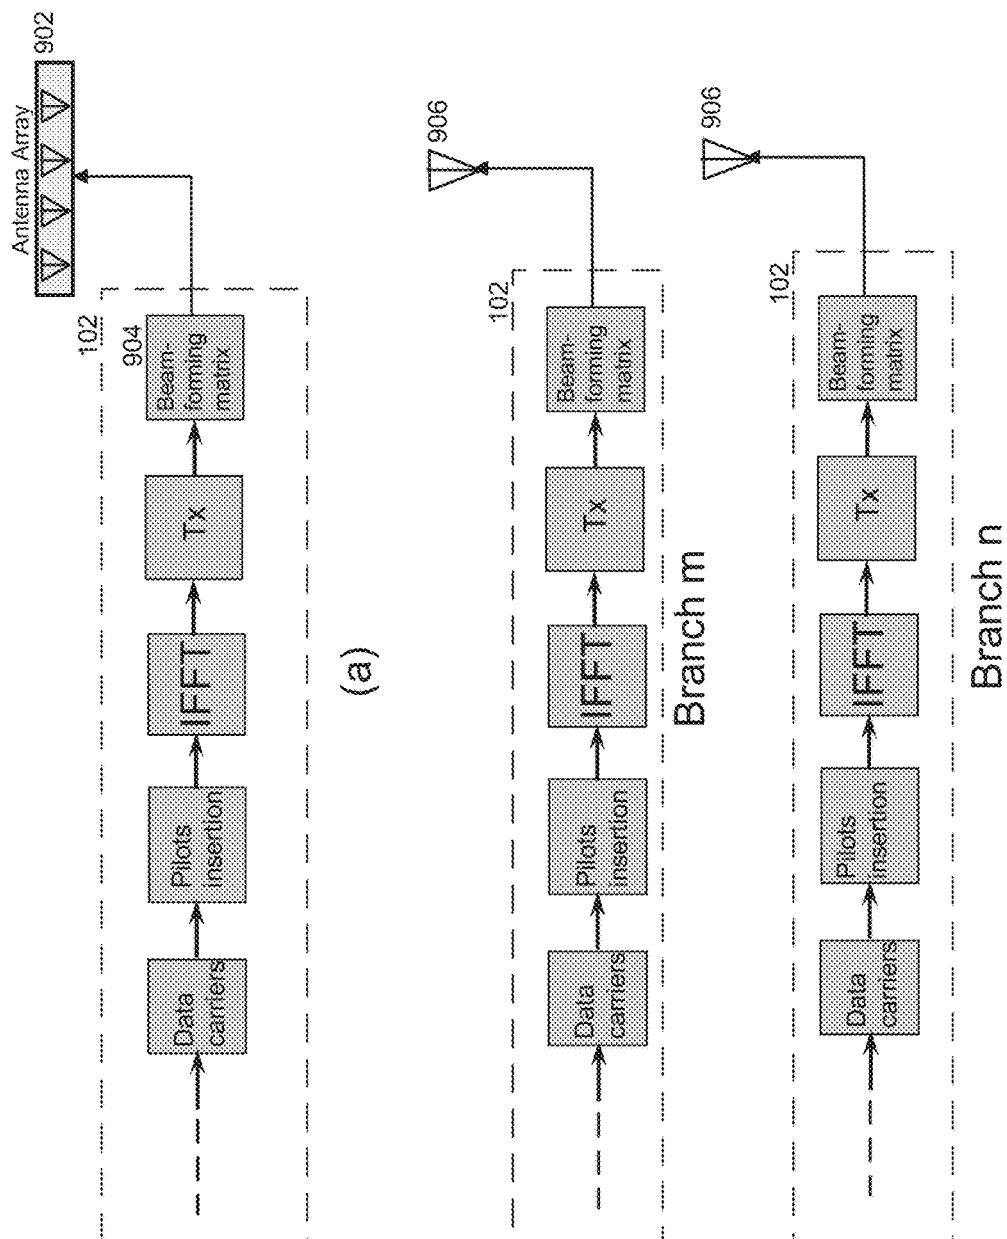

(b)

FIG. 9

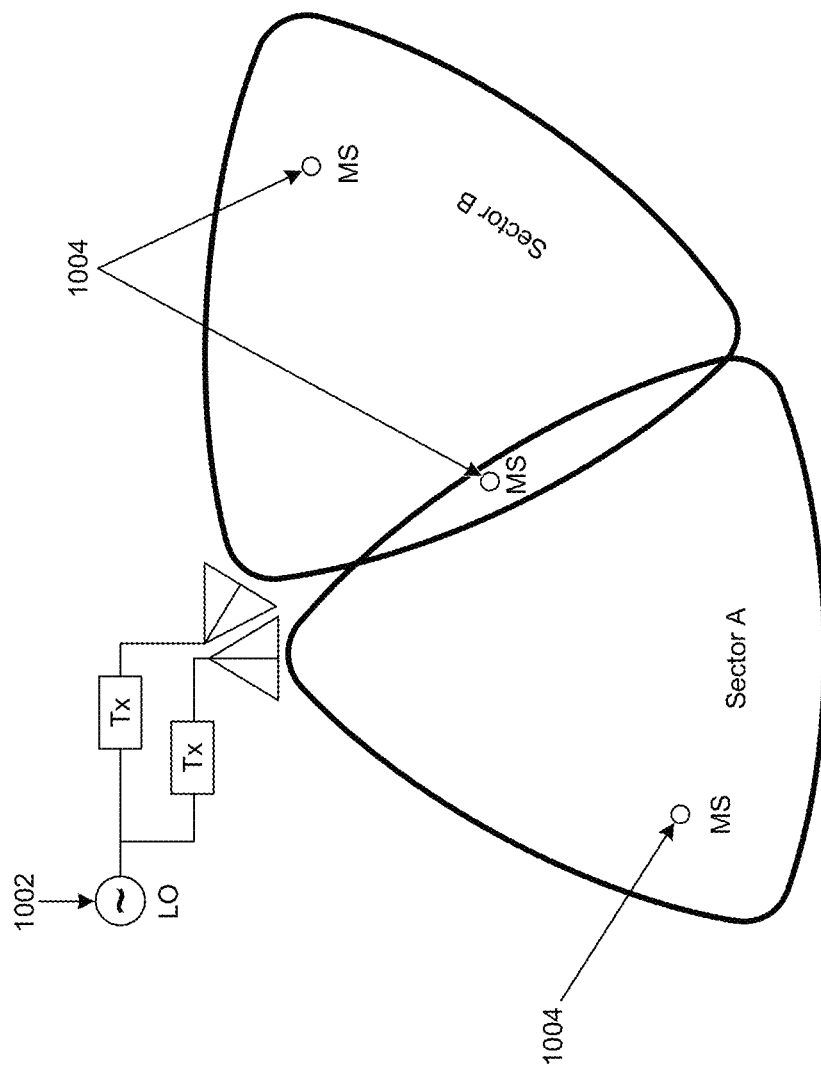


FIG. 10

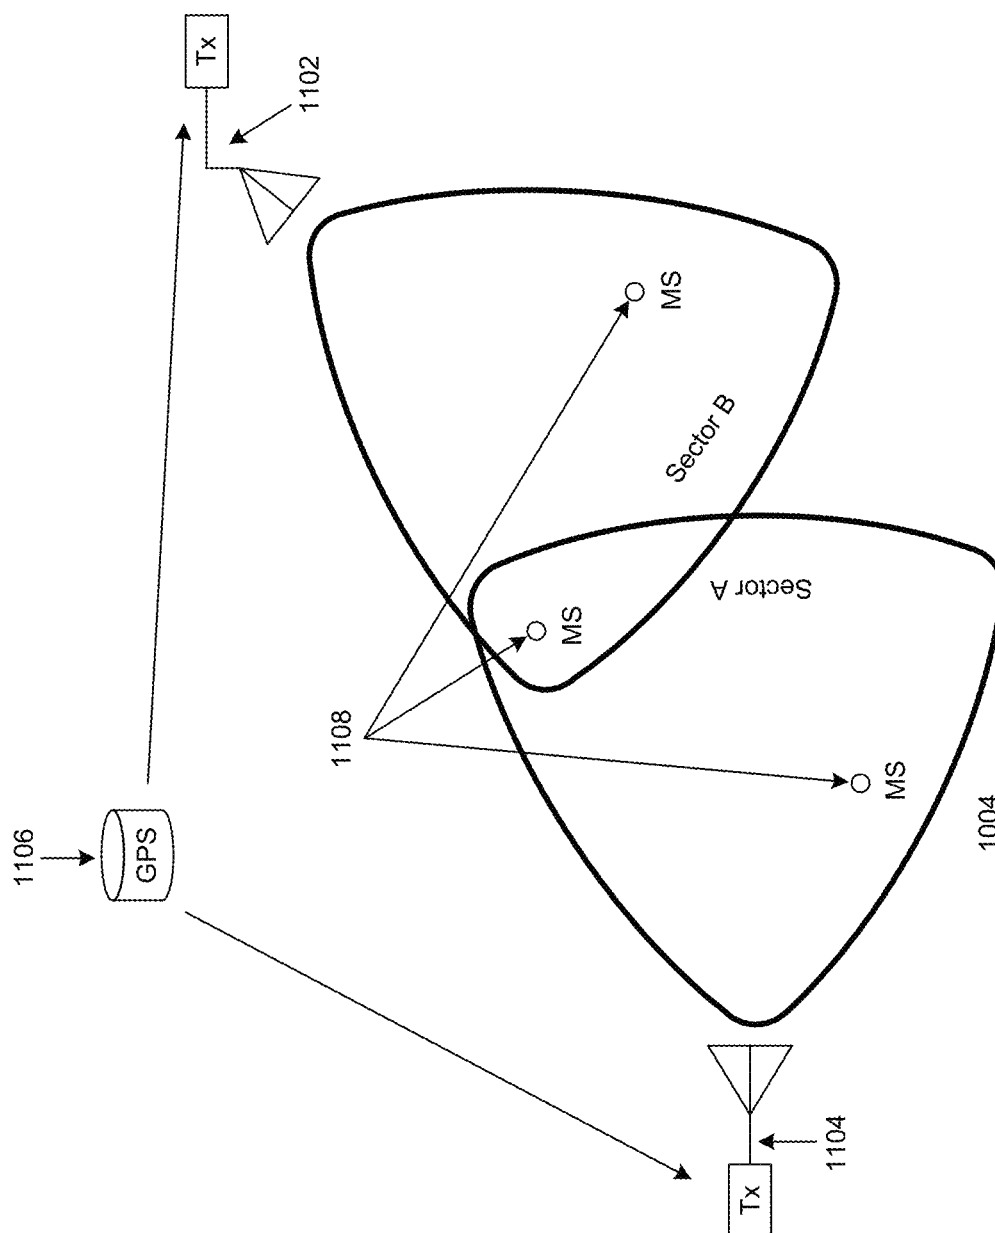


FIG. 11

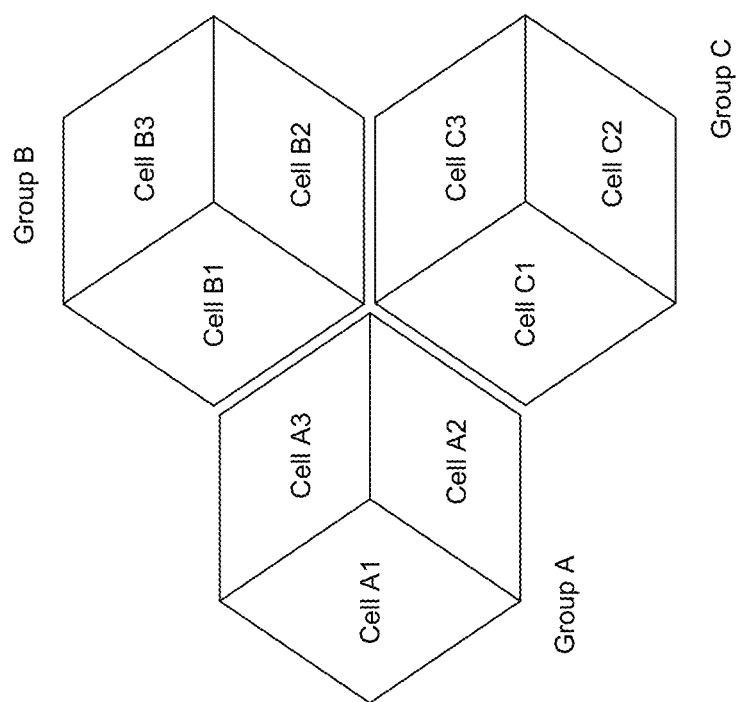


FIG. 12

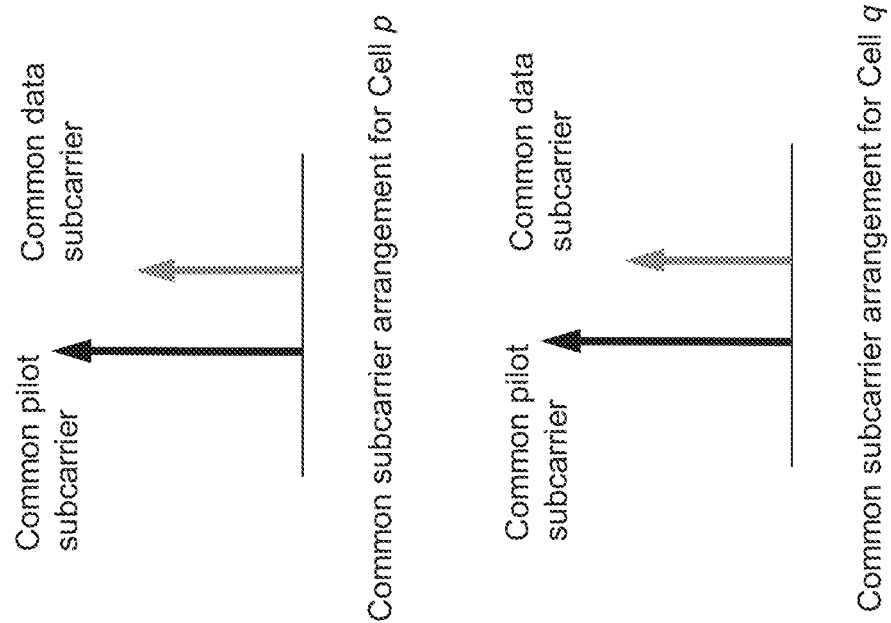


FIG. 13

US 10,965,512 B2

1

**METHOD AND APPARATUS USING
CELL-SPECIFIC AND COMMON PILOT
SUBCARRIERS IN MULTI-CARRIER, MULTI
CELL WIRELESS COMMUNICATION
NETWORKS**

**CROSS-REFERENCE TO RELATED
APPLICATION(S)**

This application is a continuation of U.S. patent application Ser. No. 16/440,754, filed Jun. 13, 2019, which is a continuation of U.S. patent application Ser. No. 15/688,441, filed Aug. 28, 2017, which issued as U.S. Pat. No. 10,326,631 on Jun. 18, 2019, which is a continuation of U.S. patent application Ser. No. 14/746,676, filed Jun. 22, 2015, which issued as U.S. Pat. No. 9,749,168 on Aug. 29, 2017, which is a continuation of U.S. patent application Ser. No. 14/595,132, filed Jan. 12, 2015, which issued as U.S. Pat. No. 9,065,614 on Jun. 23, 2015, which is a continuation of U.S. patent application Ser. No. 13/874,278, filed Apr. 30, 2013, which issued as U.S. Pat. No. 8,934,473 on Jan. 13, 2015, which is a continuation of U.S. patent application Ser. No. 13/212,116, filed Aug. 17, 2011, which issued as U.S. Pat. No. 8,432,891 on Apr. 30, 2013, which is a continuation of U.S. patent application Ser. No. 10/583,530, filed May 30, 2007, which issued as U.S. Pat. No. 8,009,660 on Aug. 30, 2011, which is a U.S. National Stage of PCT Application No. PCT/US05/01939, filed Jan. 20, 2005, which claims the benefit of and priority to U.S. Provisional Patent Application No. 60/540,032, filed on Jan. 29, 2004, the entire contents of all of which are hereby incorporated by reference herein.

BACKGROUND

In multi-carrier wireless communications, many important system functions such as frequency synchronization and channel estimation, depicted in FIG. 1, are facilitated by using the network information provided by a portion of total subcarriers such as pilot subcarriers. The fidelity level of the received subcarriers dictates how well these functions can be achieved, which in turn affect the efficiency and capacity of the entire network.

In a wireless network, there are a number of base stations, each of which provides coverage to designated areas, normally called a cell. If a cell is divided into sectors, from a system engineering point of view each sector can be considered a cell. In this context, the terms “cell” and “sector” are interchangeable. The network information can be categorized into two types: the cell-specific information that is unique to a particular cell, and the common information that is common to the entire network or to a portion of the entire networks such as a group of cells.

In a multi-cell environment, for example, the base station transmitter of each cell transmits its own pilot subcarriers, in addition to data carriers, to be used by the receivers within the cell. In such an environment, carrying out the pilot-dependent functions becomes a challenging task in that, in addition to the degradation due to multipath propagation channels, signals originated from the base stations at different cells interfere with each other.

One approach to deal with the interference problem has been to have each cell transmit a particular pattern of pilot subcarriers based on a certain type of cell-dependent random process. This approach, to a certain degree, has mitigated the impact of the mutual interference between the pilot subcarriers from adjacent cells; however, it has not provided for a

2

careful and systematic consideration of the unique requirements of the pilot subcarriers.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a basic multi-carrier wireless communication system consisting of a transmitter and a receiver.

FIG. 2 shows basic structure of a multi-carrier signal in the frequency domain, which is made up of subcarriers.

FIG. 3 shows a radio resource divided into small units in both the frequency and time domains: subchannels and time slots.

FIG. 4 depicts a cellular wireless network comprised of multiple cells, in each of which coverage is provided by a base station (BS).

FIG. 5 shows pilot subcarriers divided into two groups: cell-specific pilot subcarriers and common pilot subcarriers.

FIG. 6 is an embodiment of pilot-generation-and-insertion functional block shown in FIG. 1, which employs a microprocessor to generate pilot subcarriers and insert them into a frequency sequence contained in the electronic memory.

FIG. 7 shows that common pilot subcarriers are generated by a microprocessor of FIG. 6 to realize phase diversity.

FIG. 8 is an embodiment of delay diversity, which effectively creates phase diversity by adding a random delay time duration, either in baseband or RF, to the time-domain signals.

FIG. 9 shows two examples for extension to multiple antenna applications.

FIG. 10 is an embodiment of synchronization in frequency and time domains of two collocated base stations sharing a common frequency oscillator.

FIG. 11 is an embodiment of synchronization in frequency and time domains with base stations at different locations sharing a common frequency reference signal generated from the GPS signals.

FIG. 12 is an embodiment depicting a wireless network consisting of three groups of cells (or sectors) and base stations in each group that share their own set of common pilot subcarriers.

FIG. 13 shows all base stations within a network transmit, along with a common pilot subcarrier, a data subcarrier carrying data information common to all cells in the network.

DETAILED DESCRIPTION

In the following description the invention is explained with respect to some of its various embodiments, providing specific details for a thorough understanding and enablement. However, one skilled in the art will understand that the invention may be practiced without such details. In other instances, well-known structures and functions have not been shown or described in detail to avoid obscuring the depiction of the embodiments.

Unless the context clearly requires otherwise, throughout the description and the claims, the words “comprise,” “comprising,” and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of “including, but not limited to.” Words using the singular or plural number also include the plural or singular number respectively. Additionally, the words “herein,” “above,” “below” and words of similar import, when used in this application, shall refer to this application as a whole and not to any particular portions of this application. When the claims use the word “or” in reference to a list of two or more items, that word covers all of the

US 10,965,512 B2

3

following interpretations of the word: any of the items in the list, all of the items in the list and any combination of the items in the list.

FIG. 1 depicts a basic multi-carrier wireless communication system consisting of a transmitter **102** and a receiver **104**. A functional block **106** at the transmitter, called Pilot generation and insertion, generates pilot subcarriers and inserts them into predetermined frequency locations. These pilot subcarriers are used by the receiver to carry out certain functions. In aspects of this invention, pilot subcarriers are divided into two different groups according to their functionalities, and hence their distinct requirements. The transmission format of each group of pilot subcarriers will be designed so that it optimizes the performance of the system functions such as frequency synchronization and channel estimation.

The first group is called “cell-specific pilot subcarriers,” and will be used by the receiver **104** to extract information unique to each individual cell. For example, these cell-specific pilot subcarriers can be used in channel estimation where it is necessary for a particular receiver to be able to differentiate the pilot subcarriers that are intended for its use from those of other cells. For these pilot subcarriers, counter-interference methods are necessary.

The second group is termed “common pilot sub-carriers,” and are designed to possess a set of characteristics common to all base stations of the system. Thus, every receiver **104** within the system is able to exploit these common pilot subcarriers to perform necessary functions without interference problem. For instance, these common pilot subcarriers can be used in the frequency synchronization process, where it is not necessary to discriminate pilot subcarriers of different cells, but it is desirable for the receiver to combine coherently the energy of common pilot subcarriers with the same carrier index from different cells, so as to achieve relatively accurate frequency estimation.

Aspects of this invention provide methods to define the transmission formats of the cell-specific and common pilot subcarriers that enable a receiver to perform different system functions. In particular, a set of design criteria are provided for pilot subcarriers. Other features of this invention further provide apparatus or means to implement the above design processes and methods. In particular, signal reception can be improved by manipulating phase values of the pilot subcarriers and by using power control.

The methods and processes can also be extended to other cases, such as where multiple antennas are used within an individual sector and where some subcarriers are used to carry common network/system information. Base stations can be synchronized in frequency and time by sharing a common frequency oscillator or a common frequency reference signal, such as the one generated from the signals provided by the Global Positioning System (GPS).

Multi-Carrier Communication System

In a multi-carrier communication system such as multi-carrier code division multiple access (MC-CDMA) and orthogonal frequency division multiple access (OFDMA), information data are multiplexed on subcarriers that are mutually orthogonal in the frequency domain. In effect, a frequency selective channel is broken into a number of parallel but small segments in frequency that can be treated as flat fading channels and hence can be easily dealt with using simple one-tap equalizers. The modulation/demodulation can be performed using the fast Fourier transform (FFT).

In a multi-carrier communication system the physical media resource (e.g., radio or cable) can be divided in both

4

the frequency and the time domains. This canonical division provides a high flexibility and fine granularity for resource sharing. The basic structure of a multi-carrier signal in the frequency domain is made up of subcarriers, and within a particular spectral band or channel there are a fixed number of subcarriers. There are three types of subcarriers:

1. Data subcarriers, which carry information data;
2. Pilot subcarriers, whose phases and amplitudes are predetermined and made known to all receivers and which are used for assisting system functions such as estimation of system parameters; and
3. Silent subcarriers, which have no energy and are used for guard bands and DC carriers.

The data subcarriers can be arranged into groups called subchannels to support multiple access and scalability. The subcarriers forming one subchannel are not necessarily adjacent to each other. This concept is illustrated in FIG. 2, showing a basic structure of a multi-carrier signal **200** in the frequency domain, which is made up of subcarriers. Data subcarriers can be grouped into subchannels in a particular way. The pilot subcarriers are also distributed over the entire channel in a particular way.

The basic structure of a multi-carrier signal in the time domain is made up of time slots to support multiple-access. The resource division in both the frequency and time domains is depicted in FIG. 3 which shows a radio resource divided into small units in both the frequency and time domains: subchannels and time slots, **300**. The basic structure of a multi-carrier signal in the time domain is made up of time slots.

As depicted in FIG. 1, in a multi-carrier communication system, a generic transmitter may consist of the following functional blocks:

1. Encoding and modulation **108**
2. Pilot generation and insertion **106**
3. Inverse fast Fourier transform (IFFT) **110**
4. Transmission **112**

And a generic receiver may consist of the following functional blocks:

1. Reception **114**
2. Frame synchronization **116**
3. Frequency and timing compensation **118**
4. Fast Fourier transform (FFT) **120**
5. Frequency, timing, and channel estimation **122**
6. Channel compensation **124**
7. Decoding **126**

Cellular Wireless Networks

In a cellular wireless network, the geographical region to be serviced by the network is normally divided into smaller areas called cells. In each cell the coverage is provided by a base station. Thus, this type of structure is normally referred to as the cellular structure depicted in FIG. 4, which illustrates a cellular wireless network **400** comprised of multiple cells **402**, in each of which coverage is provided by a base station (BS) **404**. Mobile stations are distributed within each coverage area.

A base station **404** is connected to the backbone of the network via a dedicated link and also provides radio links to mobile stations within its coverage. A base station **404** also serves as a focal point to distribute information to and collect information from its mobile stations by radio signals. The mobile stations within each coverage area are used as the interface between the users and the network.

In an M-cell wireless network arrangement, with one-way or two-way communication and time division or frequency division duplexing, the transmitters at all the cells are synchronized via a particular means and are transmitting

US 10,965,512 B2

5

simultaneously. In a specific cell **402** of this arrangement, the p th cell, a receiver receives a signal at a specific subcarrier, the i th subcarrier, at the time t_k , which can be described as:

$$s_i(t_k) = a_{i,p}(t_k)e^{j\varphi_{i,p}(t_k)} + \sum_{\substack{m=1 \\ m \neq p}}^M a_{i,m}(t_k)e^{j\varphi_{i,m}(t_k)} \quad (1)$$

where $a_{i,m}(t_k)$ and $\varphi_{i,m}(t_k)$ denote the signal amplitude and phase, respectively, associated with the i^{th} subcarrier from the base station of the m^{th} cell.

Cell-Specific Pilot Subcarriers

If the i th subcarrier is used as a pilot subcarrier at the p th cell for the cell-specific purposes, the cell-specific information carried by $a_{i,p}(t_k)$ and $\varphi_{i,p}(t_k)$ will be of interest to the receiver at the p th cell and other signals described by the second term on the right hand side of equation (1) will be interference, which is an incoherent sum of signals from other cells. In this case, a sufficient level of the carrier-to-interference ratio (CIR) is required to obtain the estimates of $a_{i,p}(t_k)$ and $\varphi_{i,p}(t_k)$ with desirable accuracy.

There are many ways to boost the CIR. For examples, the amplitude of a pilot subcarrier can be set larger than that of a data subcarrier; power control can be applied to the pilot subcarriers; and cells adjacent to the p th cell may avoid using the i th subcarrier as pilot subcarrier. All these can be achieved with coordination between the cells based on certain processes, described below.

Common Pilot Subcarriers

The common pilot subcarriers for different cells are normally aligned in the frequency index at the time of transmission, as depicted in FIG. **5**, which shows pilot subcarriers divided into two groups: cell-specific pilot subcarriers and common pilot subcarriers. The cell-specific pilot subcarriers for different cells are not necessarily aligned in frequency. They can be used by the receiver to extract cell-specific information. The common pilot subcarriers for different cells may be aligned in frequency, and possess a set of attributes common to all base stations within the network. Thus, every receiver within the system is able to exploit these common pilot subcarriers without interference problem. The power of the pilot subcarriers can be varied through a particular power control scheme and based on a specific application.

If the i th subcarrier is used as a pilot subcarrier at the p th cell for the common purposes, it is not necessary to consider the second term on the right hand side of equation (1) to be interference. Instead, this term can be turned into a coherent component of the desirable signal by designing the common pilot carriers to meet the criteria specified in the aspects of this invention, provided that base stations at all cells are synchronized in frequency and time. In such a case the cell in which the receiver is located becomes irrelevant and, consequently, the received signal can be rewritten as:

$$s_i(t_k) = \sum_{m=1}^M a_{i,m}(t_k)e^{j\varphi_{i,m}(t_k)} \quad (2)$$

The common pilot subcarriers can be used for a number of functionalities, such as frequency offset estimation and timing estimation.

6

To estimate the frequency, normally signals at different times are utilized. In an example with two common pilot subcarriers of the same frequency index, the received signal at time t_{k+1} , with respect to the received signal at time t_k , is given by

$$s_i(t_{k+1}) = e^{j2\pi f_i \Delta t} \sum_{m=1}^M a_{i,m}(t_{k+1})e^{j\varphi_{i,m}(t_{k+1})} \quad (3)$$

where $\Delta t = t_{k+1} - t_k$. If Δt is much less than the coherence period of the channel and

$$a_{i,m}(t_k) = c_i a_{i,m}(t_{k+1}) \quad (4)$$

and

$$\varphi_{i,m}(t_k) = \varphi_{i,m}(t_{k+1}) + \beta_i \quad (5)$$

then the frequency can be determined by

$$2\pi f_i \Delta t = \arg\{s_i(t_k)s_i(t_{k+1})\} - \beta_i \quad (6)$$

where $c_i > 0$ and $-\pi \leq \beta_i \leq \pi$ or are predetermined constants for all values of m . And from all the frequency estimates $\{f_i\}$, a frequency offset can be derived based on a certain criterion.

For timing estimation, normally multiple common pilot carriers are required. In an example of two common pilot subcarriers, the received signal at f_n , is given by

$$s_n(t_k) = e^{j2\pi \Delta f T_s t_k} \sum_{m=1}^M a_{n,m}(t_k)e^{j\varphi_{n,m}(t_k)} \quad (7)$$

where $\Delta f = f_n - f_i$ and T_s denotes the sampling period. If Δf is much less than the coherence bandwidth of the channel and

$$a_{i,m}(t_k) = c(t_k) a_{n,m}(t_k) \quad (8)$$

and

$$\varphi_{i,m}(t_k) = \varphi_{n,m}(t_k) + \gamma(t_k) \quad (9)$$

then T_s can be determined by

$$2\pi \Delta f T_s(t_k) = \arg\{s_i^*(t_k)s_n(t_k)\} - \gamma(t_k) \quad (10)$$

where $c(t_k) > 0$ and $-\pi \leq \gamma(t_k) \leq \pi$ are predetermined constants for all values of m .

FIG. **6** is an embodiment of pilot-generation-and-insertion functional block **106** shown in FIG. **1**, which employs a microprocessor **602** to generate pilot subcarriers and insert them into a frequency sequence contained in electronic memory **604**. In one embodiment of the invention illustrated in FIG. **6**, a microprocessor **602** embedded in the pilot-generation-and-insertion functional block **106** computes the attributes of the pilot subcarriers such as their frequency indices and complex values specified by their requirements, and insert them into the frequency sequence contained in the electronic memory **604**, such as a RAM, ready for the application of IFFT.

Diversity for Common Pilot Subcarriers

Considering equation (2), which is the sum of a number of complex signals, it is possible for these signals to be destructively superimposed on each other and cause the amplitude of the receiver signal at this particular subcarrier to be so small that the signal itself becomes unreliable. Phase diversity can help this adverse effect. In the example of

US 10,965,512 B2

7

frequency estimation, a random phase $\vartheta_{l,m}$ can be added to another pilot subcarrier, say the l th subcarrier, which results in

$$\Phi_{l,m}(t_k) = \Phi_{l,m}(t_k) + \vartheta_{l,m} \quad (11)$$

and

$$\Phi_{l,m}(t_{k+1}) = \Phi_{l,m}(t_{k+1}) + \vartheta_{l,m} \quad (12)$$

where $\vartheta_{l,m}$ should be set differently for each cell, and provided that the following condition is met,

$$\Phi_{l,m}(t_k) = \Phi_{l,m}(t_{k+1}) + \beta_l, \text{ for all values of } m \quad (13)$$

With the phase diversity, it is expected that the probability of both $|s_i(t_k)|$ and $|s_j(t_k)|$ diminishing at the same time is relatively small. The embodiment of phase diversity is depicted in FIG. 7, which shows common pilot subcarriers generated by a microprocessor of FIG. 6 to realize phase diversity. It should be noted that time delay will achieve the equivalent diversity effect.

Another embodiment is illustrated in FIG. 8, which effectively creates phase diversity by adding a random delay time duration **802**, either in baseband or RF, to the time-domain signals.

Power Control for Pilot Subcarriers

In one embodiment of the invention, power control can be applied to the pilot subcarriers. The power of the pilot subcarriers can be adjusted individually or as a subgroup to

1. meet the needs of their functionalities;
2. adapt to the operation environments (e.g., propagation channels); and
3. reduce interference between cells or groups of cells.

In another embodiment power control is implemented differently for cell-specific pilot subcarriers and common pilot subcarriers. For example, stronger power is applied to common pilot subcarriers than to the cell-specific subcarriers.

Application to Multiple Antennas

The methods and processes provided by this invention can also be implemented in applications where multiple antennas are used within an individual sector, provided that the criteria specified either by equations (4) and (5) for frequency estimation or by equations (8) and (9) for timing estimation are satisfied.

FIG. 9 shows two examples for extension to multiple antenna applications. In case (a) where there is only one transmission branch that is connected to an array of antennas **902** through a transformer **904** (e.g., a beam-forming matrix), the implementation is exactly the same as in the case of single antenna. In case (b) of multiple transmission branches connected to different antennas **906** (e.g., in a transmission diversity scheme or a multiple-input multiple-output scheme), the cell-specific pilot subcarriers for transmission branches are usually defined by a multiple-antenna scheme whereas the common pilot subcarriers for each transmission branch are generated to meet the requirements of (4) and (5) for frequency estimation or (8) and (9) for timing estimation.

Joint-Use of Cell-Specific and Common Pilot Subcarriers

In one embodiment the cell-specific and common pilot subcarriers can be used jointly in the same process based on certain information theoretic criteria, such as the optimization of the signal-to-noise ratio. For example, in the estimation of a system parameter (e.g. frequency), some or all cell-specific subcarriers, if they satisfy a certain criterion, such as to exceed a CIR threshold, may be selected to be used together with the common pilot subcarriers to improve estimation accuracy. Furthermore, the common pilot sub-

8

carriers can be used along with the cell-specific subcarriers to determine the cell-specific information in some scenarios, one of which is the operation at the edge of the network.

Base Transmitters Synchronization

Base stations at all cells are required to be synchronized in frequency and time. In one embodiment of the invention the collocated base station transmitters are locked to a single frequency oscillator, as in the case where a cell is divided into sectors and the base stations of these sectors are physically placed at the same location.

FIG. 10 is an embodiment of synchronization in frequency and time domains of two collocated base stations sharing a common frequency oscillator **1002**. Mobile stations **1004** covered by these two base stations do not experience interference when receiving the common pilot subcarriers. The base station transmitters that are located at different areas are locked to a common reference frequency source, such as the GPS signal. FIG. 11 depicts an embodiment of synchronization in frequency and time domains with base stations **1102** and **1104** at different locations sharing a common frequency reference signal generated from the GPS **1106** signals. Mobile stations **1108** covered by these two base stations **1102** and **1104** do not experience interference when receiving the common pilot subcarriers.

In some applications, the entire wireless network may consist of multiple groups of cells (or sectors) and each group may have its own set of common pilot subcarriers. In such scenarios, only those base stations within their group are required to synchronize to a common reference. While the common pilot subcarriers within each group are designed to meet the criteria defined by equations (4) and (5) or by (8) and (9) for the use by its base stations, a particular counter-interference process (e.g., randomization in frequency or power control) will be applied to different sets of common pilot subcarriers. This will cause the signals from the cells within the same group to add coherently while the signals from the cells in other groups are treated as randomized interference.

One embodiment of such implementation is illustrated in FIG. 12, where a wireless network consists of three groups (A, B, and C) of cells (or sectors). The base stations within their own group share the same set of common pilot subcarriers. In this scenario, only those base stations within their group are required to synchronize to a common reference. While the common pilot subcarriers within each group are designed to meet the criteria defined in this invention, a particular counter-interference process (e.g., randomization in frequency) will be applied to different sets of common pilot subcarriers. For example, the base stations at Cells A1, A2, and A3 in Group A synchronize to their own common reference source and transmit the same set of common pilot subcarriers; and the base stations at Cells B1, B2, and B3 in Group B synchronize to their own reference source and transmit another set of common pilot subcarriers that are located at different places in the frequency domain.

Extension to Transmission of Data Information

All design processes, criteria, and methods described in the embodiments of this invention can be extended to applications where common network information is required to be distributed to all receivers within the network. In one example, all the base stations within the network transmit, along with some common pilot subcarriers, an identical set of data subcarriers in which the data information common to all the cells in the network is imbedded.

FIG. 13 shows all base stations within a network transmit, along with a common pilot subcarrier, a data subcarrier carrying data information common to all cells in the net-

US 10,965,512 B2

9

work. A receiver within the network can determine the composite channel coefficient based on the common pilot subcarrier and apply it to the data subcarrier to compensate for the channel effect, thereby recovering the data information.

The above detailed descriptions of embodiments of the invention are not intended to be exhaustive or to limit the invention to the precise form disclosed above. While specific embodiments of, and examples for, the invention are described above for illustrative purposes, various equivalent modifications are possible within the scope of the invention, as those skilled in the relevant art will recognize. For example, while steps are presented in a given order, alternative embodiments may perform routines having steps in a different order. The teachings of the invention provided herein can be applied to other systems, not necessarily the system described herein. These and other changes can be made to the invention in light of the detailed description.

The elements and acts of the various embodiments described above can be combined to provide further embodiments.

These and other All of the above U.S. patents and applications and other references are incorporated herein by reference. Aspects of the invention can be modified, if necessary, to employ the systems, functions and concepts of the various references described above to provide yet further embodiments of the invention.

Changes can be made to the invention in light of the above detailed description. In general, the terms used in the following claims should not be construed to limit the invention to the specific embodiments disclosed in the specification, unless the above detailed description explicitly defines such terms. Accordingly, the actual scope of the invention encompasses the disclosed embodiments and all equivalent ways of practicing or implementing the invention under the claims.

While certain aspects of the invention are presented below in certain claim forms, the inventors contemplate the various aspects of the invention in any number of claim forms. For example, while only one aspect of the invention is recited as embodied in a computer-readable medium, other aspects may likewise be embodied in a computer-readable medium. Accordingly, the inventors reserve the right to add additional claims after filing the application to pursue such additional claim forms for other aspects of the invention.

What is claimed is:

1. An orthogonal frequency division multiple access (OFDMA)-compatible base station that uses subcarriers in a frequency domain and time slots in a time domain, the OFDMA-compatible base station comprising:

a plurality of antennas; and
a transmitter operably coupled to the plurality of antennas;

the transmitter configured to:

insert first pilots of a first type onto a first plurality of subcarriers, wherein the first pilots are cell-specific pilots; and

insert data and second pilots of a second type onto a second plurality of subcarriers;

wherein at least some subcarriers of the first plurality of subcarriers or the second plurality of subcarriers are beam-formed; and

the plurality of antennas configured to transmit the first plurality of subcarriers and the second plurality of subcarriers in at least one of the time slots;

wherein the second type is different than the first type and wherein the first pilots do not interfere with the second pilots.

10

2. The OFDMA-compatible base station of claim 1 wherein all subcarriers of the first plurality of subcarriers are different than all subcarriers of the second plurality of subcarriers.

3. The OFDMA-compatible base station of claim 1 wherein the second plurality of subcarriers includes an n^{th} subcarrier and an $n+18$ subcarrier spaced apart from the n^{th} subcarrier by 17 subcarriers and the first plurality of subcarriers includes an m^{th} subcarrier and an $m+20$ subcarrier spaced apart from the m^{th} subcarrier by 19 subcarriers.

4. The OFDMA-compatible base station of claim 1 wherein each cell-specific pilot of the cell-specific pilots is unique to a respective cell.

5. The OFDMA-compatible base station of claim 1 wherein the first plurality of subcarriers are not aligned in frequency with subcarriers of at least another cell onto which respective cell-specific pilots are inserted.

6. The OFDMA-compatible base station of claim 1 wherein the second plurality of subcarriers are beam-formed.

7. The OFDMA-compatible base station of claim 1 wherein the cell-specific pilots are used to convey cell-specific information.

8. A method performed by an orthogonal frequency division multiple access (OFDMA)-compatible base station that uses subcarriers in a frequency domain and time slots in a time domain, the method comprising:

inserting, by the OFDMA-compatible base station, first pilots of a first type onto a first plurality of subcarriers, wherein the first pilots are cell-specific pilots;

inserting, by the OFDMA-compatible base station, data and second pilots of a second type onto a second plurality of subcarriers;

wherein at least some subcarriers of the first plurality of subcarriers or the second plurality of subcarriers are beam-formed; and

transmitting, by the OFDMA-compatible base station, the first plurality of subcarriers and the second plurality of subcarriers in at least one of the time slots using a plurality of antennas;

wherein the second type is different than the first type and wherein the first pilots do not interfere with the second pilots.

9. The method of claim 8 wherein all subcarriers of the first plurality of subcarriers are different than all subcarriers of the second plurality of subcarriers.

10. The method of claim 8 wherein the second plurality of subcarriers includes an n^{th} subcarrier and an $n+18$ subcarrier spaced apart from the n^{th} subcarrier by 17 subcarriers and the first plurality of subcarriers includes an m^{th} subcarrier and an $m+20$ subcarrier spaced apart from the m^{th} subcarrier by 19 subcarriers.

11. The method of claim 8 wherein each cell-specific pilot of the cell-specific pilots is unique to a respective cell.

12. The method of claim 8 wherein the first plurality of subcarriers are not aligned in frequency with subcarriers of at least another cell onto which respective cell-specific pilots are inserted.

13. The method of claim 8 wherein the second plurality of subcarriers are beam-formed.

14. The method of claim 8 wherein the cell-specific pilots are used to convey cell-specific information.

15. An orthogonal frequency division multiple access (OFDMA)-compatible mobile station that uses subcarriers in a frequency domain and time slots in a time domain, the OFDMA-compatible mobile station comprising:

US 10,965,512 B2

11

at least one antenna; and
 a receiver; and
 the at least one antenna and the receiver are configured to:
 receive first pilots of a first type on a first plurality of
 subcarriers, wherein the first pilots are cell-specific
 pilots; and
 receive second pilots of a second type and data on a
 second plurality of subcarriers, wherein the first
 plurality of subcarriers and the second plurality of
 subcarriers are received in at least one of the time
 slots;
 wherein at least some subcarriers of the first plurality of
 subcarriers or the second plurality of subcarriers are
 beam-formed; and
 the receiver is further configured to:
 recover the data using channel estimates from at least
 the second pilots; and
 recover cell-specific information using the cell-specific
 pilots;
 wherein the second type is different than the first type and
 wherein the first pilots do not interfere with the second
 pilots.

16. The OFDMA-compatible mobile station of claim **15**
 wherein all subcarriers of the first plurality of subcarriers are
 different than all subcarriers of the second plurality of
 subcarriers.

17. The OFDMA-compatible mobile station of claim **15**
 wherein the second plurality of subcarriers includes an n^{th}
 subcarrier and an $n+18$ subcarrier spaced apart from the n^{th}
 subcarrier by 17 subcarriers and the first plurality of sub-
 carriers includes an m^{th} subcarrier and an $m+20$ subcarrier
 spaced apart from the m^{th} subcarrier by 19 subcarriers.

18. The OFDMA-compatible mobile station of claim **15**
 wherein each cell-specific pilot of the cell-specific pilots is
 unique to a respective cell.

19. The OFDMA-compatible mobile station of claim **15**
 wherein the first plurality of subcarriers are transmitted at a
 same time as the second plurality of subcarriers.

20. The OFDMA-compatible mobile station of claim **15**
 wherein the second plurality of subcarriers are beam-
 formed.

21. The OFDMA-compatible mobile station of claim **15**
 wherein the first plurality of subcarriers are not aligned in
 frequency with subcarriers of at least another cell onto
 which respective cell-specific pilots are inserted.

12

22. The OFDMA-compatible mobile station of claim **15**
 wherein the receiver is further configured to extract cell-
 specific information from the cell-specific pilots.

23. A method performed by an orthogonal frequency
 division multiple access (OFDMA)-compatible mobile sta-
 tion that uses subcarriers in a frequency domain and time
 slots in a time domain, the method comprising:

 receiving first pilots of a first type on a first plurality of
 subcarriers, wherein the first pilots are cell-specific
 pilots;

 receiving second pilots of a second type and data on a
 second plurality of subcarriers, wherein the first plu-
 rality of subcarriers and the second plurality of subcar-
 riers are received in at least one of the time slots;

 wherein at least some subcarriers of the first plurality of
 subcarriers or the second plurality of subcarriers are
 beam-formed;

 recovering the data using channel estimates from at least
 the second pilots; and

 recovering cell-specific information using the cell-spe-
 cific pilots;

 wherein the second type is different than the first type and
 wherein the first pilots do not interfere with the second
 pilots.

24. The method of claim **23** wherein all subcarriers of the
 first plurality of subcarriers are different than all subcarriers
 of the second plurality of subcarriers.

25. The method of claim **23** wherein the second plurality
 of subcarriers includes an n^{th} subcarrier and an $n+18$ sub-
 carrier spaced apart from the n^{th} subcarrier by 17 subcarriers
 and the first plurality of subcarriers includes an m^{th} subcar-
 rier and an $m+20$ subcarrier spaced apart from the m^{th}
 subcarrier by 19 subcarriers.

26. The method of claim **23** wherein each cell-specific
 pilot of the cell-specific pilots is unique to a respective cell.

27. The method of claim **23** wherein the first plurality of
 subcarriers are transmitted at a same time as the second
 plurality of subcarriers.

28. The method of claim **23** wherein the second plurality
 of subcarriers are beam-formed.

29. The method of claim **23** wherein the first plurality of
 subcarriers are not aligned in frequency with subcarriers of
 at least another cell onto which respective cell-specific pilots
 are inserted.

30. The method of claim **23** further comprising extracting
 cell-specific information from the cell-specific pilots.

* * * * *